


### Specifications

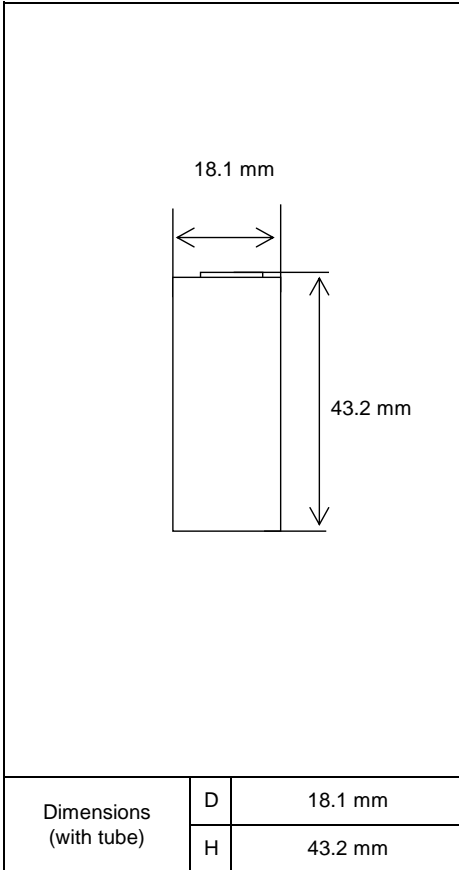


Type : Nickel-Metal Hydride Battery		Size : 4/5FA
Capacity <sup>1)</sup>	Typical	1650mAh
	Minimum	1500mAh
Nominal Voltage		1.2V
Charging Current x Time	Fast Charge <sup>2)</sup>	1650 mA x about 1.1h
Ambient Temp.	Charge Condition	Fast Charge <sup>2)</sup>
	Discharge Condition	
	0°C - +50°C	
Storage Condition	Less than 30days	-20°C - +50°C
	Less than 90days	-20°C - +40°C
	Less than 1year	-20°C - +30°C
Internal Impedance <sup>3)</sup> (after discharge to E.V.=1.0V)		Approx. 6 mΩ(at 1000Hz)
Weight <sup>4)</sup>		Approx. 37 g
Size <sup>4)</sup> : (Diameter) x (Height)		18.1(D) x 43.2(H) mm

- 1) Single cell capacity under the following condition.  
Charge : 165mA x 16h, Discharge : 330mA (E.V.=1.0V) at 20°C
- 2) Use recommended charging system.
- 3) After a few charge and discharge cycles under the above 1) condition.
- 4) With tube.

### Typical Characteristics

#### Charge

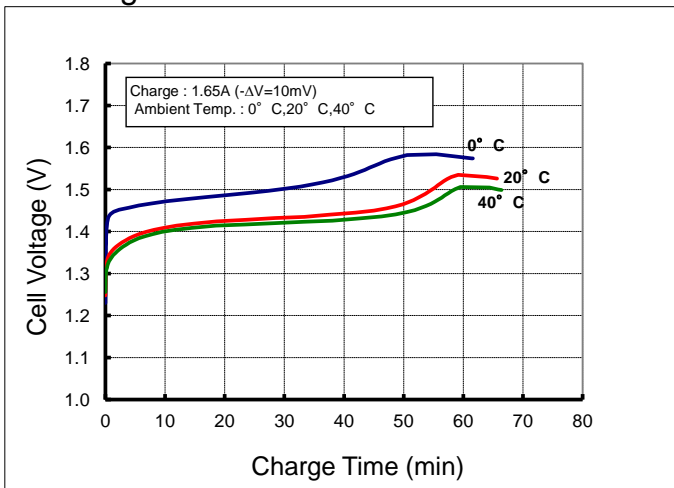

#### Discharge

