
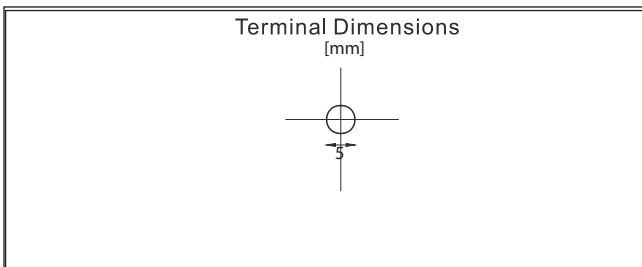


Voltage	: 12 Volt
Capacity	: 22Ah
Dimensions	: 181x77x167mm (LxWxH)
Terminal	: M6 Insert
Container & lid	: Flame retardant ABS
Approximate weight	: 6.4kg
Certificate(s)	: CE, UL
RoHS Compliant	: Yes

- Typical Applications:**
- Golf trolleys
 - Agricultural trolleys
 - Lifts & hoists
 - Garden tools
 - Lifting platforms
 - Sensors
 - UPS systems

Capacity	
30 minute rate (300W)	: 150Wh
15 minute rate (498W)	: 125Wh
5 minute rate (879W)	: 73.25Wh
Internal Resistance (fully charged) : 9mOhm	
Capacity versus temperature	
40°C	: 102%
25°C	: 100%
0°C	: 85%
-15°C	: 65%
Charge (constant voltage)	
Initial Charging current <5,5A	
Float use: 13.5 - 13.8 Volt. -20mV/°C	
Cyclic use: 14.1 - 14.4 Volt. -30mV/°C	

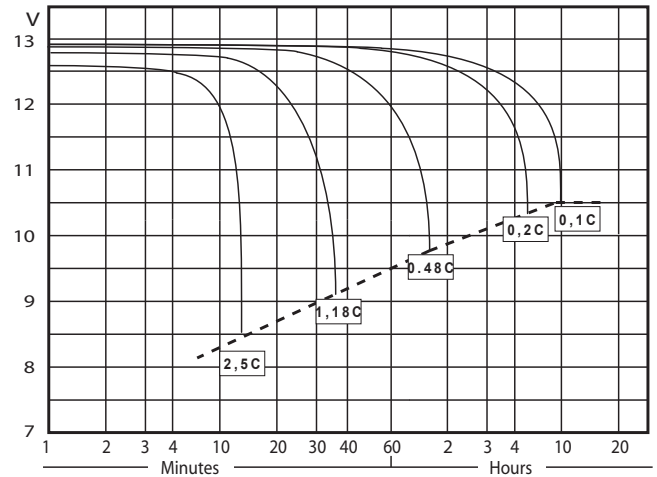

Discharge data watt/battery

	Discharge time	5 min	10 min	15 min	20 min	30 min	45 min	60 min	90 min
End Voltage	11.1	650	478	382	339	243	178	141	109
	10.8	730	535	420	367	262	189	149	115
	10.5	767	598	474	396	295	212	165	119
	10.2	804	612	487	403	300	219	172	125
	9.6	879	658	510	420	313	231	181	134